




NOTES :

1. ALL WORK AND MATERIALS SHALL BE PER STANDARD NO. 700.
2. SEE STANDARD 708 FOR THRUST BLOCKS, STANDARD 715 FOR VALVE BOXES AND STANDARD 707 FOR VALVE ANCHOR BLOCKS.
3. UNDERGROUND CLAMPS SHALL BE INSTALLED ON ALL "TAKE-OFFS" AND/OR SIDE CONNECTIONS FOR FUTURE USE.
4. VALVES SHALL BE INSTALLED ON ALL LEGS OF CROSSES AND TEES.

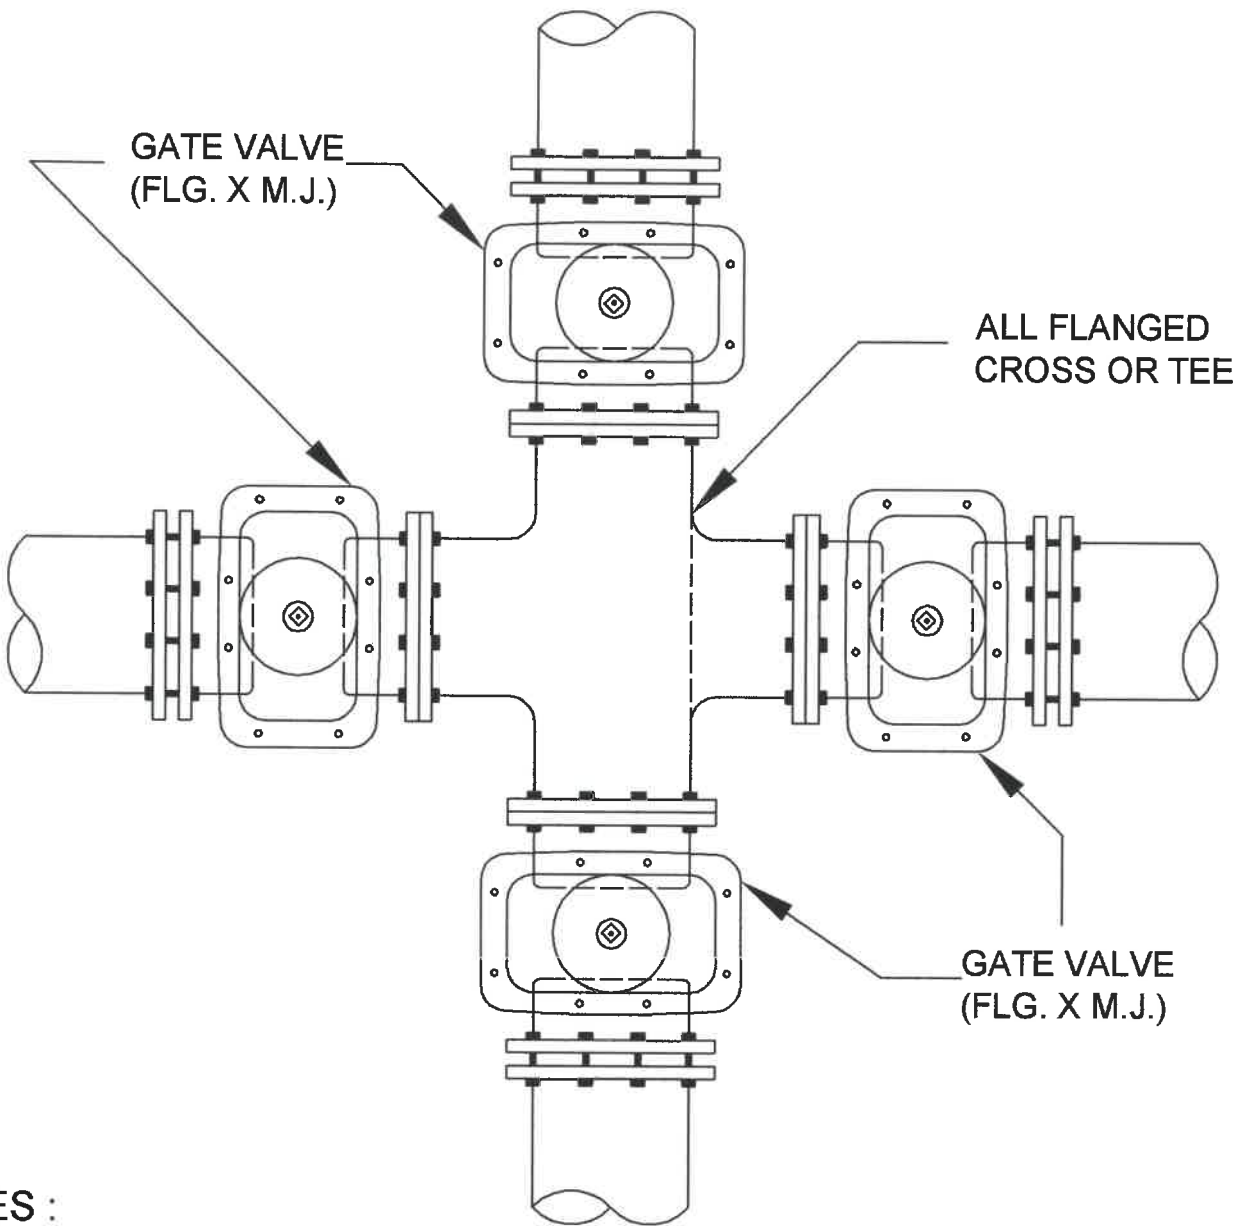

PUBLIC WORKS SERVICES

STANDARD VALVE INSTALLATION

APPROVED: *[Signature]* 8/15/00
CITY OF ARCADIA-PUBLIC WORKS SERVICES DIRECTOR DATE

APPROVED: *[Signature]* 14527 7/27/00
CITY OF ARCADIA - CITY ENGINEER RCE No. DATE

REVISIONS:	DATE	REVISIONS:	DATE
A		3	
A		4	
SCALE: NOT TO SCALE			
STANDARD PLAN NUMBER			
716			
SHEET 1 of 1			