



ASPHALTIC CONCRETE PAVEMENT

NTS

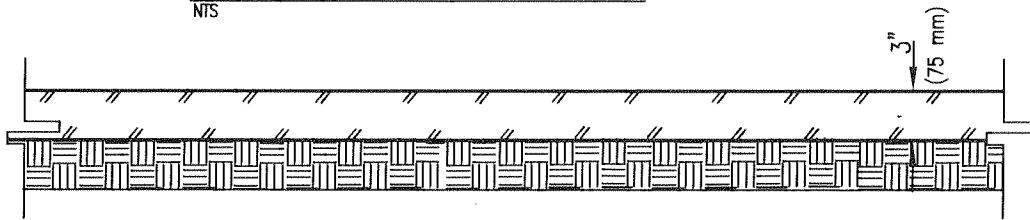

LIGHT COMMERCIAL AND RESIDENTIAL PAVING MAY USE
3" (75mm) ASPHALTIC CONCRETE OVER COMPACTED EARTH.

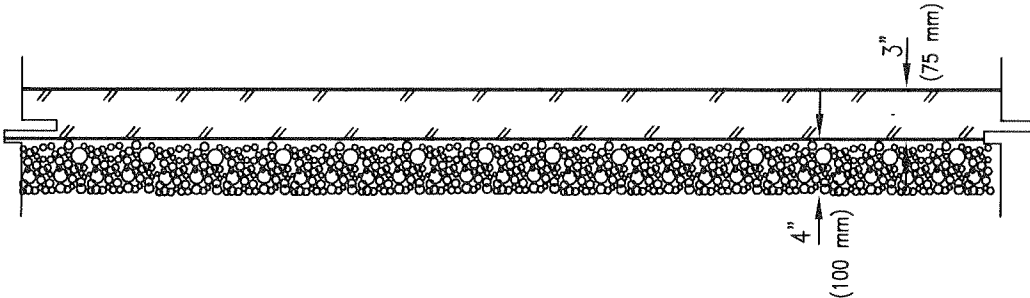


INDUSTRIAL PAVEMENT SHALL BE 3" (75mm) ASPHALTIC CONCRETE OVER
4" (100mm) AGGREGATE BASE OR SHALL BE DESIGNED ON BASIS OF
SOILS TEST DATA.

Asphaltic Concrete Pavement shall be C2-AR-4000 and shall be three inches (3") in thickness. The relative compaction of the subgrade soil shall be ninety-five percent (95%) and shall meet the compaction tests of Section 211-2 of the "Green Book". Fair to good soil shall be compacted 4" (100mm), poor soil 5" (125mm), and very poor soil 6" (150mm).

PORTLAND CEMENT CONCRETE PAVEMENT

NTS

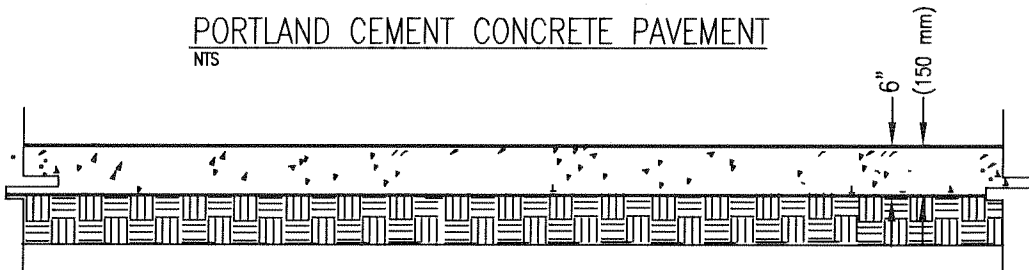

P.C.C. PAVEMENT SHALL BE 6" (150 mm) OVER COMPACTED BASE

Portland cement concrete pavement shall be class 520-C-2500 (C-310-17) and shall be 6" (150 mm) in thickness. The relative compaction of the subgrade soil shall be ninety-five percent (95%) and shall meet the compaction tests of Section 211-2 of the "Green Book".

PARKING AREA
PAVEMENT

CITY OF ARCADIA
DEVELOPMENT SERVICES DEPT. - ENGINEERING DIV.

STANDARD DRAWING

803 - 1

DATE:

12/8/03

SCALE:

NONE

DRAWN BY:

AG/JC

38971

RCE

SHEET 1 OF 1